


Perimeter Edge Metal

EverGuard® GAF SingleCantilever Coping (Aluminum, Steel)

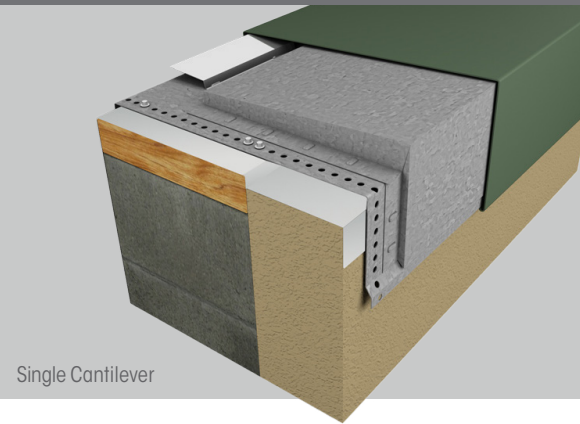

Single Cantilever

Description:

EverGuard® Single Cantilever Coping provides an excellent solution for attachment to a parapet wall with non-structural exterior building facade conditions such as EIFS, bricks, or panels. We offer a variety of color options, including standard and custom, as well as a variety of finish options, including anodized. Easy-to-install EverGuard® Single Cantilever Coping gives you design flexibility to help you meet your specific job requirements.

Features and Benefits:

- 8" concealed splice plates with dual non-curling isocryl butyl sealant strips allow for thermal movement of materials and sealing of joints.
- Factory-fabricated miters provide a clean, aesthetically pleasing appearance and can help save time by eliminating the need for field fabrication.

- 12"-wide anchor clips provide more positive attachment, ensuring extra stability for the system. All splice plates and fasteners are included and arrive to the job site with the product.
- Express, standard, and premium colors and finishes are available to meet your job requirements and include a 30-year limited Kynar 500® finish warranty on coil-coated standard colors. For limited warranty details, please visit gaf.com.
- Custom colors are also available. A 10-year limited warranty is included for post-painted Kynar®-coated aluminum applications unless otherwise stated. A 20-year limited warranty may be available upon request for certain colors.*

* Restrictions apply; consult your GAF Territory Manager for more information.

Codes and Compliance:

- Evaluated in accordance with ANSI/SPRI ES-1, which is a requirement of IBC Section 1504.5 for roof system metal edge securement.
- FM Approved per Approval Standard 4435. Refer to RoofNav.com product detail report for approved uses, requirements, and ratings.
- Miami-Dade County Product Control Approved



Express Colors¹ available for quick shipping²




For standard and premium colors, please refer to the GAF color chart, available at gaf.com/PerimeterEdgeMetal. Custom colors are also available.

¹ Express Colors available in shorter lead times for 24 ga., .040", and .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".

² It is difficult to reproduce the color clarity of these products. Before selecting your color, please contact your local GAF territory manager to request a paint chip for accurate color representation.

Single Cantilever

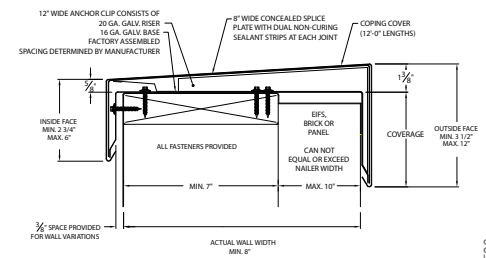

Product Specifications

AVAILABLE SIZES	MINIMUM	MAXIMUM**
Inside face	2.75" (69.9 mm)	4" (102 mm)
Wall width	16" (406.4 mm)	24" (610 mm)
Outside face	3.5" (88.9 mm)	10" (254 mm)
Width		Up to 4" (102 mm)
LENGTH	12 ft. (3.65 m)	
COVER MATERIALS	22 ga. steel 24 ga. steel 0.040" aluminum 0.050" aluminum 0.063" aluminum	
FINISHES	Mill aluminum Pre-finished Kynar 500® (See standard color chart) Premium pre-finished Kynar 500® (See standard color chart) Post-finished Kynar 500® Pre-finished anodized aluminum — clear, bronze, or black Post-finished anodized aluminum Custom post-coated Kynar 500® finishes are available	

** The following sizes are also available, but are neither FM Approved nor Miami-Dade County Product Control Approved: inside face 6"; wall width 32"; outside face 12". Any dimension outside the max. tested range needs to be tested to ES1 standard.



Visit gaf.com/PerimeterEdgeMetal

We protect what matters most™

